



Picture may vary from actual product

## Easy.Cash

Make paying on foot even easier for your patrons. The standard model of the SKIDATA range of pay-on-foot machines combines a modern design with versatile functionality and proven technology. Take advantage of ultimate reliability and availability.

### Easy.Cash – Your Benefits

- **Modern look & feel**  
Easy to operate, with a stylish design for maximum business exposure.
- **Proven functionality**  
Reliable technology for profit-yielding business models.
- **Protected investment**  
Maximizing benefits at minimum risk.

### Your image builder

- **Look & Feel**  
Modern design highlights your business competence.
- **Corporate Identity**  
On request, Easy.Cash is also available in your corporate colors.

### More security


- **Intelligent key management**  
Operator.Service 'Webkey' brings full transparency to your key management.
- **Refined technology**  
Internationally proven technologies – such as the flexible, self-refilling cash processing unit - ensures ultimate system reliability and availability.

### Utilizing potential

- **Modern ticketing**  
Take advantage of Print@Home, RFID, magstripe and barcode technologies.
- **Planned growth**  
Easy-to-install extension options support new business models and numerous co-operation options.

### Convenience for you and your patrons

- **Easy, intuitive user interaction**  
Excellent ergonomic usability – even for wheelchair users – helps to promote throughput.
- **Easy to maintain**  
Easy.Cash is low in maintenance and related costs.

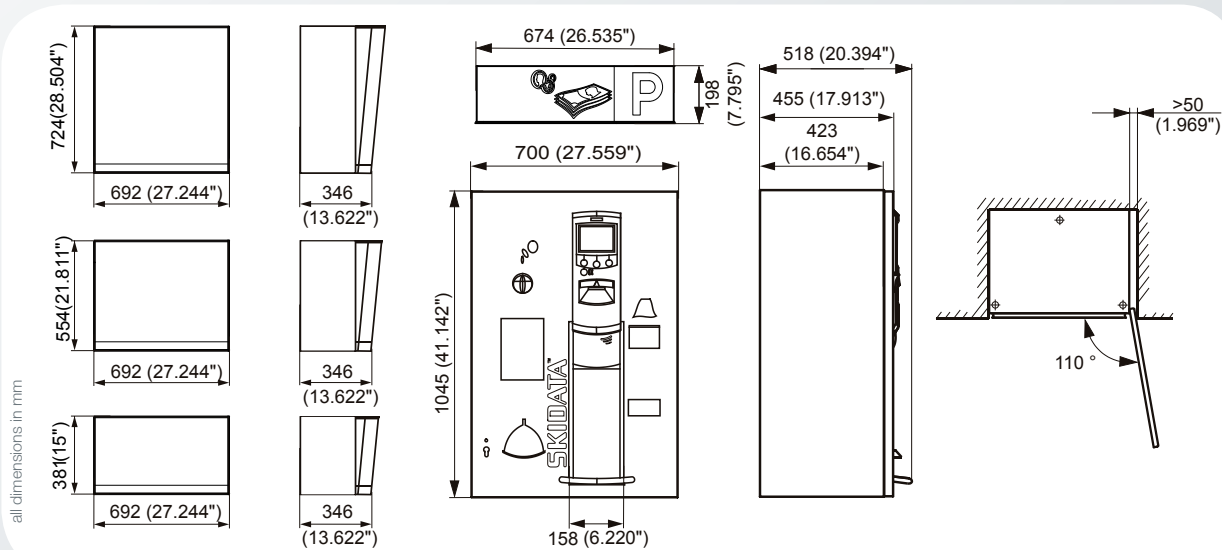

all dimensions in mm

## Features

### Design/Structure

- Compact, modern design
- Basic unit powder coated steel enclosure, and controls and design elements made from polycarbonate
- VdS-certified enclosure construction
- Built-in alarm system, intercom station (analog), call button, three soft keys
- Buffer memory (ensures proper transaction management in case of a power failure, up to 10 min.)
- Heater, cooling fan, and power supply
- Expansion bays for add-on components, such as pin pad, credit card terminal, and fiscal printer
- Issuing of up to 3000 receipts
- Control unit, complete with hard disk

### Operation

- 14.5 cm (5.7") TFT color display, break-proof monitor screen
- Ergonomically arranged user interaction controls
- User guidance with color display and illuminated pictograms
- Users can switch on-screen language at any time
- Extremely easy to operate by staff

### Cash handling system

- Electronic coin validator, accepts up to 16 different coins (including 2 programmable token)
- 4 compact coin containers (each approx. 250 coins)
- Self-locking coin box, made from high-grade stainless steel
- Compact coin containers come with lockable covers

## Options

### Design/Structure

- Illumination attachment (integrated 'Parking' sign, coin and bill symbols, space for custom logo)
- Pedestal (optionally with or without front door panel)
- Pedestal 'elevated' (optionally with or without front door panel)
- Wall-mount console
- Locking system with mechanical or electronic locks (supports configurable permissions)

### Cash management system

- Banknote validator SC83 for up to 48 bill denominations in 4 directions, complete with bill stacker box for up to 1200 bills
- Bill-to-Bill banknote recycler: handles up to 23 bill denominations in 4 directions; stacker box for up to 1000 banknotes and 3 self-refilling change-giving drums for approx. 110 bills
- Extra coin container (2 × approx. 1000 coins; non-self-refilling), incl. lockable front panel

### Coder/ticket technology

- Coder Unlimited (supported data carrier formats depend on modules selected)
- Coder Basic (for cross-wise barcode and validation via hole punch)
- RFID Module (for reading and writing/coding of keycards)
- RFID Module 13 MHz (for e.g. keycards / contract parker)
- Print@Home Scanner

## Technical Specifications

Dimensions without pedestal	700 mm × 1045 mm × 455 mm / 27.56" × 41.14" × 17.91" (w × h × d)
Height with pedestal 'elevated'	1769 mm / 69.65"
Power supply	230 V AC / 50 Hz; 120 V AC / 60 Hz
Power consumption	max. 600 W (with heater on)
Temperature range during operation	-25 °C to +50 °C (-13 °F to + 122 °F) ambient temperature; unit not directly exposed to sunlight
Color of enclosure and illumination attachment	RAL 9007 (grey aluminum)
Color of plastic front-panel elements	RAL 7043 (traffic gray B)
Color of front panel	RAL 9007 (gray aluminum), RAL 7021 (black-gray)
Color of pedestal	RAL 7021 (black-gray)
Ticket slot	Pantone 114 U (yellow)
Supported data carrier formats	SKIDATA tickets for thermal print labelling, with/without magnetic stripe, SKIDATA ThermoPlast and with ISO standard magnetic stripes, ISO 7816 compliant smart cards, Contactless ISO 14443, ISO 15693 compliant cards Options for pay terminals: smart cards, EC cards, credit cards The functionality of integrated data carriers is provided subject to the individual system configuration.
Declarations / Certifications	CE, FCC, IC, <sub>c</sub> NRTL <sub>US</sub> (only 120 V-option), VdS, Ukr-Sepco
Degree of protection based on IEC 60529	IP43 if installed in protected location as described in the instructions for installation

SKIDATA AG • Untersbergstraße 40 • A-5083 Grödig/Salzburg  
[t] +43 6246 888-0 • [f] +43 6246 888-7 • [e] info@skidata.com [w] www.skidata.com • Version 5.9 • 11.12.2014

© 2014 SKIDATA AG. All rights reserved.

The content provided herein is subject to change and possible editorial errors. Country-specific versions may vary. SKIDATA® is a registered trademark of SKIDATA AG in the USA, the European Union and other countries. Terms and conditions of the authorized SKIDATA distributor apply. The operator is fully responsible for compliance with any legal provisions applicable to the operation of the products.