



Picture may vary from actual product

# Ampere.Gate



Electric charging:  
Power with  
Intelligence

The electric charging station Ampere.Gate enables convenient handling of the entire charging procedure of an electric car in your garage. Fully integrated into the SKIDATA solution, you and your guests benefit from a single billing for parking and charging and an optimized, convenient workflow. Position yourself as a leader in sustainability and decide your rates for the charging independently from electricity providers.

## User-friendly charging solution

With the Ampere.Gate a registration for the charging process is not necessary. Your customers can simply plug their electric car into the column and pay for the charging together with the parking ticket. A complicated selection of the charging station on a separate monitor is omitted.

## Flexible pricing

By offering charging as an additional service during parking you set the prices yourself and therefore remain independent of the rates of a electricity provider.





## Fully integrated in the parking solution

Complete integration of the charging solution from one single provider enables you to reduce costs for the of acquisition, operation and maintenance of electric charging solution.

## Increase attractiveness

Expand your offerings with charging stations to provide and impress your customers with an environmentally friendly all-round service, giving them the convenience of charging their electric car during the parking. With increased attractiveness you reach higher utilization and therefore more revenue.

all dimensions in mm

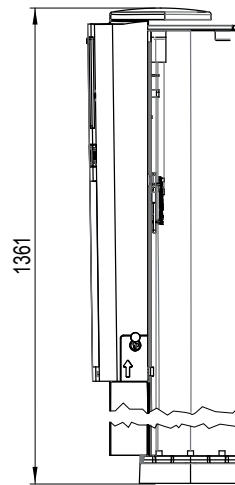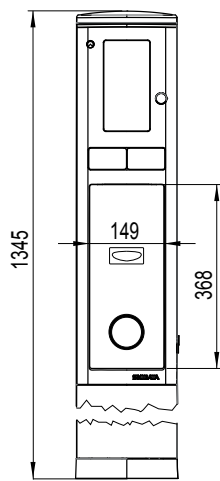

## Features

- Unique design using aluminum and high-grade synthetics
- Modular construction, easy to maintain
- Weather-proof, thanks to use of high-quality, durable materials, e.g. aluminum
- Ethernet interface for efficient system integration

### Operation

- Intuitive user interaction enables smooth, trouble-free workflows
- Visual and acoustic feedback provides additional user support

### Green Efficiency

- Optimized for extremely low power consumption
- Materials used are highly recyclable

## Standard Version

- Fast charging point for 22 kW recharging
- Optimized charging technology enables accurate accounting
- Type 2 standard connector
- Color display
- Reader for crosswise barcoded tickets
- RFID Reader

## Options

- Vingtor-Stentofon digital intercom station

## Technical Specifications

|  |  |
|--|--|
| <b>Dimensions</b>                              | 206 mm × 1345 mm × 242 mm (W × H × D)  |
| <b>Weight</b>                                  | approx. 25 kg  |
| <b>Operating voltage</b>                       | 3-phase, 400 V, 50 Hz, max. 35 A   |
| <b>Power consumption</b>                       | Standby: 6.6 W<br>Charging: 22 kW  |
| <b>Operating temperature</b>                   | -20 °C to +50 °C (in shade)<br>-20 °C to +40 °C (in sunlight)  |
| <b>Humidity</b>                                | Up to 90 % (non-condensing)  |
| <b>Color</b>                                   | Cover: RAL 7037 Dusty Gray (varnished plastic)<br>Panel: RAL 7021 Black Gray (varnished plastic)<br>Support stand: Brushed anodized aluminum |
| <b>Declarations/certifications</b>             | CE   |
| <b>Degree of protection based on IEC 60529</b> | IP34   |
| <b>System requirements</b>                     | Parking.Logic V9 or higher; e-charging software  |

Regional approval: EU (excluding France) and Switzerland